


Features

- Energy saving, no UV, IR and mercury pollution, meet ROHS requirements;
- Low-voltage constant current driver built-in isolation, security, stability, reliability;
- Using a special package and cooling technology, product MTBF can reach 25000 Hrs
- Frequent switching start, no flicker and glare phenomena; while good color; strong seismic performance;
- The appearance of light, fashionable, easy to install and transport

Application

Applicable to all types of living spaces: homes, villas, hotels, guest houses, beauty shops, cafes, shopping malls can also be used for lighting, museums and other places.

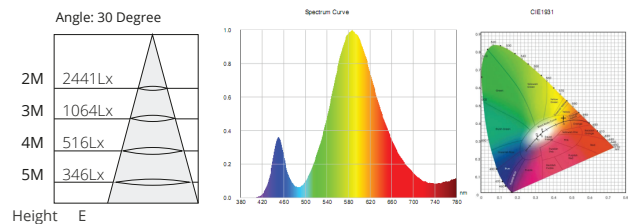

Specification

Model	Illumi PA5636
Rated Power	36W
LED Quantity	36x1W
Luminous Flux	≥3200Lm
Color Temp.	☐ Warm white (3000±200K) ☐ Natural white (4000±300K) ☐ Cool white (6000±500K)
CRI	≥70
Beam Angle	☐ 30° ☐ 45°
Input Voltage	220 VAC
Frequency	50/60Hz
Current	850mA

Dimmable	☐ Dim. ☐ Non-Dim.
Dimension	Ø180x220mm
Base Lamp	☐ E27 ☐ E40
Material	Aluminum
Weight	1480g
Operating Temp.	-20°C to 50°C
Operating Humi.	10% to 90%
Certificate	CE, RoHS, TISI
Life span*	≥30000Hrs.
Warranty	3 Years

Remark: The information contained in this document is subject to change without notice. *18Hrs/Day

NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672