





## Dimension

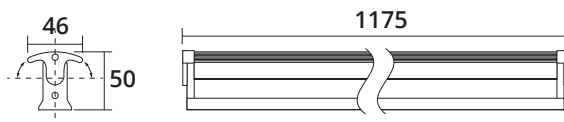

## Features

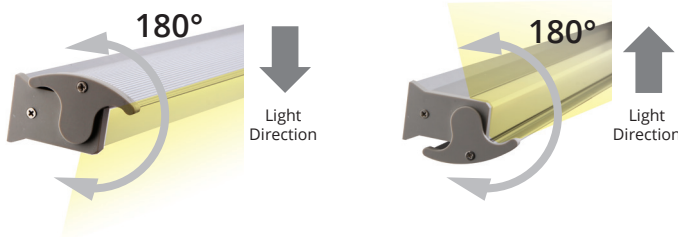

- 180° Angle adjustable for controlled directional light

## Specifications

| General Informations |                           | Electrical Informations                                                                                |                 |
|----------------------|---------------------------|--------------------------------------------------------------------------------------------------------|-----------------|
| Product Name         | NEX Alpha                 | Driver                                                                                                 | Included driver |
| Rated Power          | 30W                       | Input Voltage                                                                                          | AC200-240V      |
| Luminous Efficiency  | >70 lm/W                  | Frequency                                                                                              | 50/60Hz         |
| Luminous Flux        | >2100 lumen               | Power Factor                                                                                           | ≥0.90           |
| Color Temp.          | Natural white (4000K±400) | Total Harmonic(THDi)                                                                                   | ≤10%            |
|                      | Cool white (6500K±500)    | Surge Protection                                                                                       | 1.5kV           |
| CRI (Ra)             | ≥80                       | Dimmable                                                                                               | No              |
| Beam Angle           | 180D                      | Certificates & Test reports                                                                            |                 |
| IP Protection        | IP44                      |                                                                                                        |                 |
| Dimensions           | 46x50x1175mm              | Certificates                                                                                           | CE,RoHS,TISI    |
| Weight               | 652±10g                   | Test Reports                                                                                           | LM80/TM21       |
| Housing Material     | Aluminum                  | Remark: The information contained in this document is subject to change without notice.<br>* 18Hrs/Day |                 |
| Housing Color        | White (Grey Optional)     |                                                                                                        |                 |
| Operating Temp       | -20°C to 45°C             |                                                                                                        |                 |
| Operating Humi.      | 10% To 90%                |                                                                                                        |                 |
| Life Span            | >50000 Hrs.               |                                                                                                        |                 |
| Warranty             | 3 Years*                  |                                                                                                        |                 |

CE RoHS

