


≥3600Lm

CRI≥80

PF≥0.95

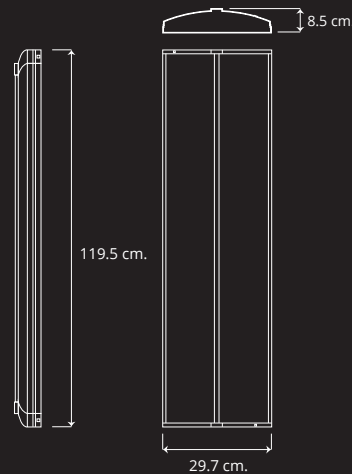

Features

- No-flicker
- Good uniformity without glare
- Less blue light
- Japanese high quality control system
- Easy install with low weight 2 kg
- New technology MCPET inside for indirect LED lighting solution
- Suitable for: High end office, School, Hotel, Restaurants, Conference rooms, Sales Area

Specification

Product Name	NEX Lunar 30120	Output Voltage	DC32-42V
Rated Power	28W	Power Factor	≥0.95
Luminous Efficiency	≥130Lm/W	Harmonic (THD)	≤15%
Luminous Flux	≥3600Lm	Dimension	W297 x L1195x H85 mm
Color Temp.	Warm white (3,000K±300) Natural white (4,000±400) Cool white (6,500±500)	Net Weight	2 kg
CRI	≥80	Operating Temp.	-25°C to 45°C
Beam Angle	140°	Operating Humi.	10% to 90%
Driver	External	Certificate	CE, RoHS, TISI
Input Voltage	AC180-240V	Life Span	≥50000Hrs.
Frequency	50/60Hz	Warranty	2 Years*

Remark: The information contained in this document is subject to change without notice.*18Hrs/Day



NEX Nex Inno Tech Co.,Ltd.

410/17-23, 410/58-62 2nd Floor
Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com