




With pin

### Dimension

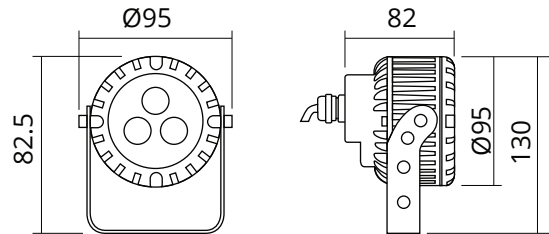

### Features

- Innovation and modern design.
- Each LED with a rod for heat transfer, LED heat sink: external & surface.
- Built-in highly efficient power supply, 48 hours aging test at 80°C before product release.

### Applications

This series of products are widely used in lighting building facades, trees and stages.

### Specifications

General Informations		Electrical Informations	
Product Name	NEX Kingston	Driver	Included
Rated Power	5W	Input Voltage	AC220V
Luminous Efficiency	>60 lm/W	Frequency	50/60Hz
Luminous Flux	300 lumen(2700K)	Control Mode	DMX512 (Optional)
Color Temp.	Warm white (2700K±300) (R,G,B,RGBW Optional)	Certificates & Test Reports	
CRI (Ra)	≥80	Certificates	CE,RoHS
Beam Angle	30D (10D,60D Optional)	Test Reports	LM80/TM21
IP Protection	IP65	Remark: The information contained in this document is subject to change without notice. * 18Hrs/Day	
Dimensions	Ø95 x 82 x130 mm	<div>CE RoHS</div>	
Material	Quality aluminum, the cover is made of high transmittance glass		
Qualifying Fixtures	2x1mm <sup>2</sup> Rubber thread		
Operating Temp.	-40°C to 55°C		
Operating Humi.	10% to 90%		
Lifespan(L70)	50000Hrs.		
Warranty	1Year*		