




With pin

### Dimension

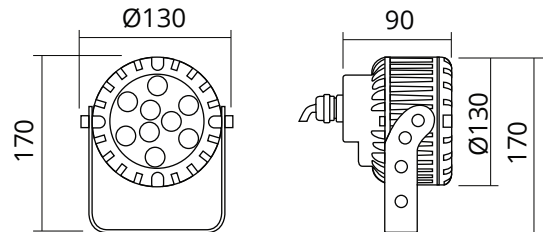

### Features

- Innovation and modern design.
- Each LED with a rod for heat transfer, LED heat sink: external & surface.
- Built-in highly efficient power supply, 48 hours aging test at 80°C before product release.

### Applications

This series of products are widely used in lighting building facades, trees and stages.

### Specifications

General Informations	
Product Name	NEX Kingston
Rated Power	9W
Luminous Efficiency	>60 lm/W
Luminous Flux	540 lumen(2700K)
Color Temp.	Warm white (2700K±300) (R,G,B,RGBW Optional)
CRI (Ra)	≥80
Beam Angle	30D (10D,60D Optional)
IP Protection	IP65
Dimensions	Ø130 x 90 x170 mm
Material	Quality aluminum, the cover is made of high transmittance glass
Qualifying Fixtures	2x1mm <sup>2</sup> Rubber thread
Operating Temp.	-40°C to 55°C
Operating Humi.	10% to 90%
Lifespan(L70)	50000Hrs.
Warranty	1Year*

Electrical Informations	
Driver	Included
Input Voltage	AC220V
Frequency	50/60Hz
Control Mode	DMX512 (Optional)
Certificates & Test Reports	
Certificates	CE,RoHS
Test Reports	LM80/TM21

Remark: The information contained in this document is subject to change without notice.  
\* 18Hrs/Day

**CE RoHS**