


LED Canopy Light 150W

≥16500Lm


CRI≥80

PF≥0.95

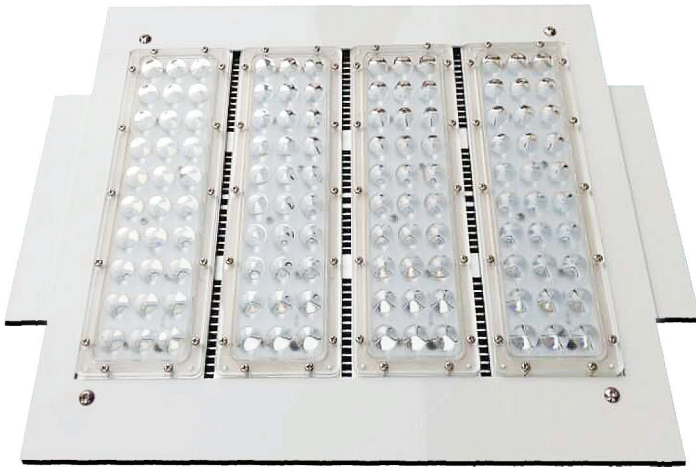

Features

- High Brightness with CREE Chip set high quality
- 150W replaces up to 400 Watt metal halide
- LM79/80 are available
- Maintenance free and operates without UV
- Can be mounted on electrical boxes or directly to surfaces
- Aluminum components in the LED model act as heat sink to reduce heat and ensure long life
- Aluminum housing UV-resistant
- High impact, heat resistant, tempered lens
- Stabilized to extrema climate changes without cracking or peeling

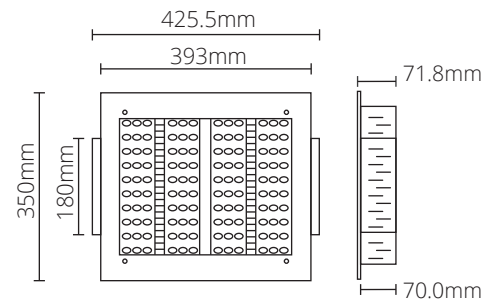

Specification

Product Name	Illumi CN-150	Environment	Outdoor or wet location
Rated Power	150W	Dimension	W350xH425.5xD71.8mm
LED Efficiency	≥110Lm/W	Replacement	400W Metal halide
Luminous Flux	≥16500Lm	Material	aluminum
Color Temp.	Warm white (3000K±300) Natural white (5000K±500)	Material of Lens	PC
CRI	≥80	Operating Temp.	-30°C to 60°C
Beam Angle	60°/ 90°	Operating Humi.	10% to 90%
Input Voltage	AC 100-277V	Certificate	ETL, DLC
Frequency	50/60Hz	Test Report	LM79, LM80, TM21
Output Current	4.16A	Life Span	≥50000Hrs.
Power Factor	≥0.95	Warranty	3 Years

Remark: The information contained in this document is subject to change without notice.



NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672