




## Dimension



## Driver

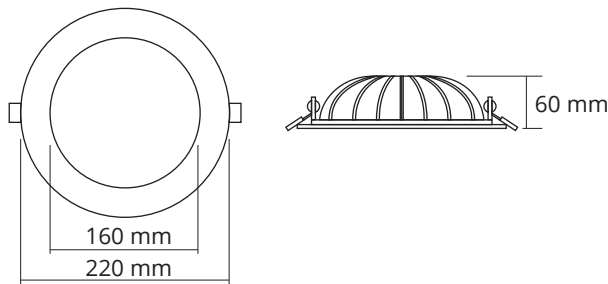

## Specifications

| General Informations |                                                       | Electrical Informations                                                                                                                                                                            |                |
|----------------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Product name         | NEX Enova DL-24                                       | Input Voltage                                                                                                                                                                                      | AC 85-265V     |
| Rated power          | 24W                                                   | Frequency                                                                                                                                                                                          | 50/60Hz        |
| Luminous efficiency  | ≥80 Lm/W                                              | Output Current                                                                                                                                                                                     | 0.25A          |
| Luminous flux        | ≥1,920 Lumen                                          | Power Factor                                                                                                                                                                                       | ≥0.95          |
| Color temp.          | Warm white (3,000K+300)<br>Natural white (4,000K+400) | Total Harmonic (THD)                                                                                                                                                                               | ≤15%           |
| CRI (Ra)             | ≥80                                                   | Certificates & Test reports                                                                                                                                                                        |                |
| Beam angle           | 120 Degree                                            | Certificates                                                                                                                                                                                       | CE, RoHS, TISI |
| Replacement          | 50W Traditional lamp                                  | Test Reports                                                                                                                                                                                       | LM80/ TM21     |
| Dimensions           | Ø220 x H60 mm                                         | Remark: The information contained in this document is subject to change without notice.<br>* 18Hrs/Day                                                                                             |                |
| Cut hole             | Ø200 mm                                               |                                                                                                                                                                                                    |                |
| Weight               | 305 g.                                                | <div>   </div> 1955-2551 |                |
| Housing material     | Aluminum Alloy                                        |                                                                                                                                                                                                    |                |
| Housing color        | White                                                 |                                                                                                                                                                                                    |                |
| Operating temp.      | -40°C to 45°C                                         |                                                                                                                                                                                                    |                |
| Operating humi.      | 10% to 90%                                            |                                                                                                                                                                                                    |                |
| Lifespan             | 50,000 Hrs.                                           |                                                                                                                                                                                                    |                |
| Warranty             | 3 Years*                                              |                                                                                                                                                                                                    |                |

## NEX Office

### Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,  
Tungmahamek, Sathorn, Bangkok 10120 Thailand  
Tel.&Fax.: +662 938 3672

Email: [info@nexledtec.com](mailto:info@nexledtec.com) [www.nexledtec.com](http://www.nexledtec.com)

### Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,  
New Taipei City 23674 Taiwan  
Tel.: 886-2-22697815 Fax.: 886-2-22697807

### Singapore

50 Raffles Place, #37-00 Singapore Land  
Tower 048623 Singapore  
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707