




LED Downlight 40W



≥3600Lm

CRI≥82


PF≥0.95

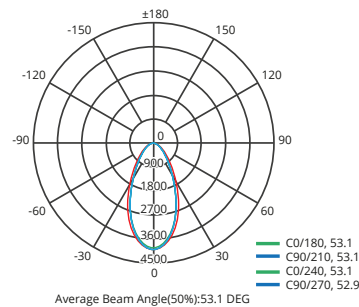

Dimension



Cutting Size
160-170mm



- High Brightness
- Even Light- emitting
- Long Lifespan

1M	4030Lx	98M
2M	1007Lx	196M
3M	447Lx	295M
4M	251Lx	393M
5M	161Lx	492M

Hight E Angle: 52.41Deg Dia.

Specification

Model	DL-40	Power Factor	≥0.95
Rated Power	44W	Dimension	Ø180x130mm
Chip type	COB LED	Cutting Size	160-170mm
Color Temp.	☐ Warm white (3000±300K)	Dimmable	Triac or Dial is available
	☐ Natural white (4000±400K)	Housing Color	☐ Aluminum ☐ White ☐ Black
	☐ Cool white (6000±500K)	Weight	1700g
Luminous Flux	≥3600Lm	Operating Temp.	-40°C to 45°C
Beam Angle	☐ 30° ☐ 60°	Operating Humidity	10% to 90%
CRI	≥82	Certificate	CE, RoHS, SAS, SAA
Input Voltage	AC 85-265V	Life Span	≥50000 Hrs.
Frequency	50/60Hz	Warranty	3 Years

Remark: The information contained in this document is subject to change without notice.

NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672