



Features

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)
- Easy installation, for wide applications



CITIZEN COB



< 3



22W/28W/38W/50W/
60W/70W/100W



80/90



30°




175mm




AC100-240/220-240V 50/60Hz



3 Years Warranty

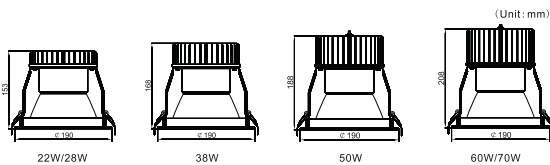

Photometric Diagram

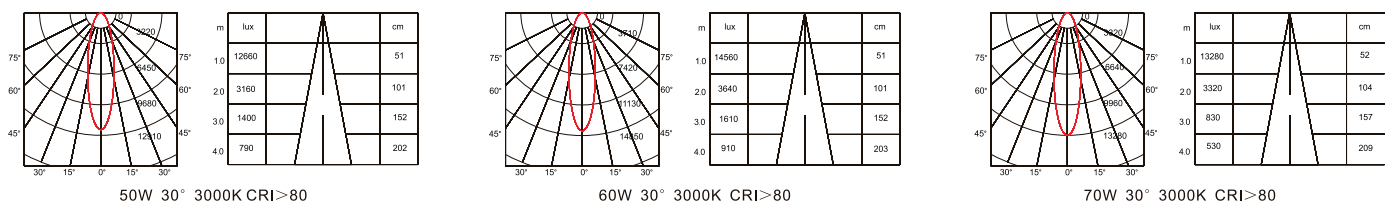

Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-DLI22-8030-C06A-30XY NX-NOL-DLI22-8040-C06A-30XY	22W	520mA	3000K 4000K	2100lm 2160lm	80	≥0.95
NX-NOL-DLI28-8030-C06A-30XY NX-NOL-DLI28-8040-C06A-30XY	28W	700mA	3000K 4000K	2800lm 2690lm	80	≥0.95
NX-NOL-DLI38-8030-C06A-30XY NX-NOL-DLI38-8040-C06A-30XY	38W	900mA	3000K 4000K	3840lm 4160lm	80	≥0.95
NX-NOL-DLI50-8030-C06A-30XY NX-NOL-DLI50-8040-C06A-30XY	50W	1200mA	3000K 4000K	5070lm 5160lm	80	≥0.95
NX-NOL-DLI60-8030-C06A-30XY NX-NOL-DLI60-8040-C06A-30XY	60W	1500mA	3000K 4000K	5830lm 5930lm	80	≥0.95
NX-NOL-DLI70-8030-C06A-30XY NX-NOL-DLI70-8040-C06A-30XY	70W	1700mA	3000K 4000K	5950lm 7000lm	80	≥0.95

Remark: X=F(ON-OFF) X=A(1-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com



Features

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)
- Easy installation, for wide applications



CITIZEN COB



< 3



22W/28W/38W/50W/
60W/70W/100W



80/90



25°/45°/50°




175mm




AC100-240/220-240V 50/60Hz




3 Years Warranty

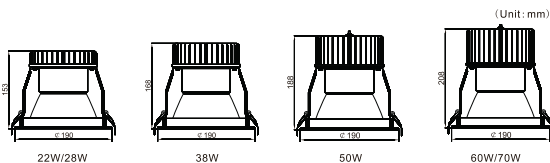


Photometric Diagram

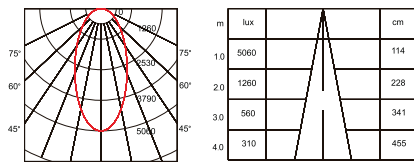

50W 55° 3000K CRI>80

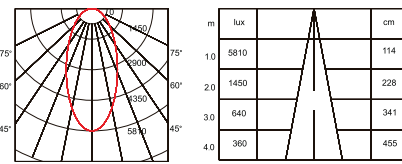

60W 55° 3000K CRI>80

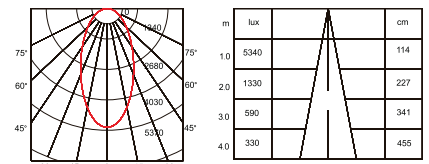

70W 55° 3000K CRI>80

Order Information

Model	Power	LED Current	CCT	Luminous Flux			CRI	PF
NX-NOL-DLI22-8030-C06B-WXY	22W	520mA	3000K	25°	2130lm/45°	2130lm/50°	80	≥0.95
NX-NOL-DLI22-8040-C06B-WXY			4000K	25°	2200lm/45°	2200lm/50°		
NX-NOL-DLI28-8030-C06B-WXY	28W	700mA	3000K	25°	2690lm/45°	2640lm/50°	80	≥0.95
NX-NOL-DLI28-8040-C06B-WXY			4000K	25°	2780lm/45°	2740lm/50°		
NX-NOL-DLI38-8030-C06B-WXY	38W	900mA	3000K	25°	3660lm/45°	3610lm/50°	80	≥0.95
NX-NOL-DLI38-8040-C06B-WXY			4000K	25°	4020lm/45°	3810lm/50°		
NX-NOL-DLI50-8030-C06B-WXY	50W	1200mA	3000K	25°	4840lm/45°	4700lm/50°	80	≥0.95
NX-NOL-DLI50-8040-C06B-WXY			4000K	25°	5040lm/45°	4890lm/50°		
NX-NOL-DLI60-8030-C06B-WXY	60W	1500mA	3000K	25°	5570lm/45°	5260lm/50°	80	≥0.95
NX-NOL-DLI60-8040-C06B-WXY			4000K	25°	5790lm/45°	5510lm/50°		
NX-NOL-DLI70-8030-C06B-WXY	70W	1700mA	3000K	32°	5310lm/50°	4990lm	80	≥0.95
NX-NOL-DLI70-8040-C06B-WXY			4000K	32°	6790lm/50°	6370lm		

Remark: W=25(25°) W=32(32°) W=45(45°) W=50(50°) X=F(ON-OFF) X=A(1-10V Dim) X=T(Triac Dim) X=D(Dali Dim)
X=N(Without Driver) Y=B(Black) Y=W(White)



NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com