




### Features

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (220-240v input) and 1-10v dimmable (100-240v input)
- The lamp turn round 360° in horizontal, 25° in right and left
- Easy installation, for wide applications

### Dimension

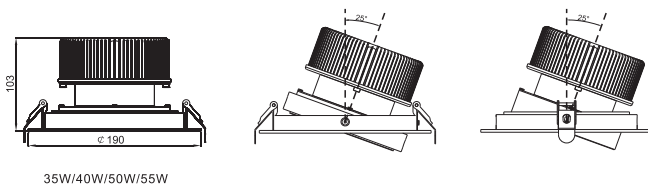

35W/40W/50W/55W



CITIZEN COB



SDCM < 3



35W/40W/50W/55W



CRI 80/90



15° / 24° / 36°  
45° / 55°



175mm




AC100-240/220-240V  
50/60Hz




3 YEAR 3 Years Warranty


### Photometric Diagram

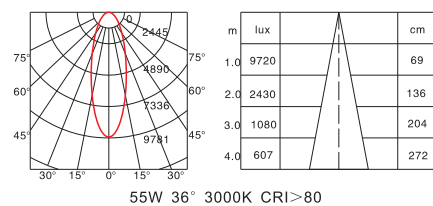

55W 36° 3000K CRI>80

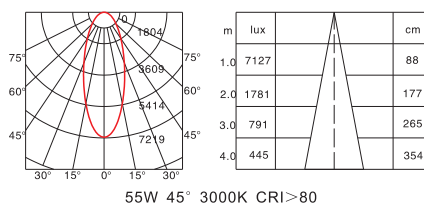

55W 45° 3000K CRI>80

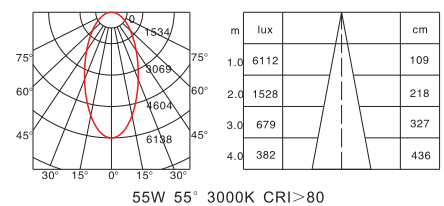

55W 55° 3000K CRI>80

### Order Information

| Model                     | Power | LED Current | CCT   | Luminous Flux | CRI | PF    |
|---------------------------|-------|-------------|-------|---------------|-----|-------|
| NX-NOL-DLI35-8030-E06-WXY | 35W   | 850mA       | 3000K | 3963lm        | 80  | ≥0.95 |
| NX-NOL-DLI35-8040-E06-WXY |       |             | 4000K | 4237lm        |     |       |
| NX-NOL-DLI40-8030-E06-WXY | 40W   | 960mA       | 3000K | 4982lm        | 80  | ≥0.95 |
| NX-NOL-DLI40-8040-E06-WXY |       |             | 4000K | 4729lm        |     |       |
| NX-NOL-DLI50-8030-E06-WXY | 50W   | 1200mA      | 3000K | 5630lm        | 80  | ≥0.95 |
| NX-NOL-DLI50-8040-E06-WXY |       |             | 4000K | 5860lm        |     |       |
| NX-NOL-DLI55-8030-E06-WXY | 55W   | 1300mA      | 3000K | 6070lm        | 80  | ≥0.95 |
| NX-NOL-DLI55-8040-E06-WXY |       |             | 4000K | 6250lm        |     |       |

Remark: W=15(15°) W=24(24°) W=36(36°) W=45(45°) W=55(55°) X=F(ON-OFF) X=A(1-10V) X=T(Triac Dim) X=D(Dali Dim)  
X=N(Without Driver) Y=B(Black) Y=W(White)



### NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,  
410/17-23 Ratchadaphisek Rd., Samsennok,  
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565  
Fax. +662 938 3672  
Email: info@nexledtech.com

www.nexledtech.com  
www.nexinnotech.com