



Features

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 30,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)
- Easy installation, for wide applications



CITIZEN COB



SDCM < 3



25W/30W/45W



CRI 80



90°/110°




205mm






AC100-240/220-240V 50/60Hz



3 YEARS 3 Years Warranty

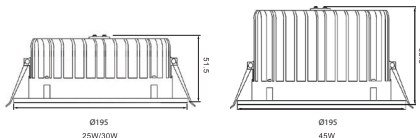

Photometric Diagram

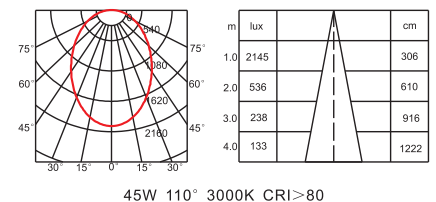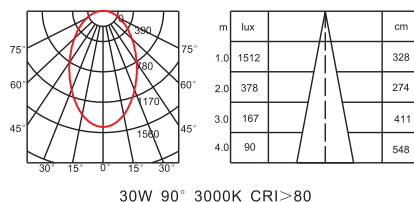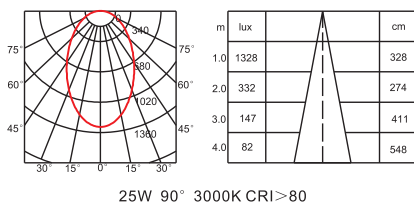

Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-DLI25-8030-T08-90XY	25W	750mA	3000K	2797lm	80	≥0.9
NX-NOL-DLI30-8030-T08-90XY	30W	900mA	3000K	3189lm	80	≥0.9
NX-NOL-DLI45-8030-T08-110XY	45W	1350mA	3000K	4548lm	80	≥0.9

Remark: X=F(ON-OFF) X=A(1-10V) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com

Ref. NEX Neolux DLI-T08 V180719-2