

Features

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 30,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)
- Easy installation, for wide applications



COB



<3



10W



80



90°



95mm




220-240V 50/60Hz



3 Years Warranty

Photometric Diagram

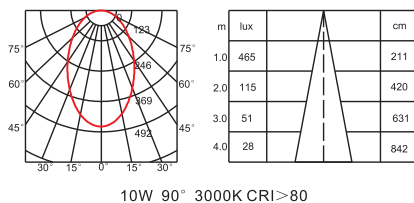

Order Information

Code	Power	LED Current	CCT	Beam Angle	Luminous Flux	CRI	PF
NLDLT3B0108279FW	10W	300mA	2700K	90°	780lm	80	≥0.9

