
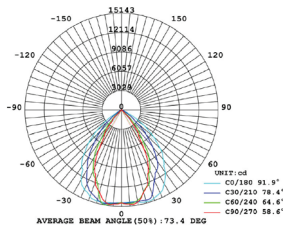




Excellent light distribution

Special rectangular light distribution, more uniform illumination effect, suitable for outside open spaces.

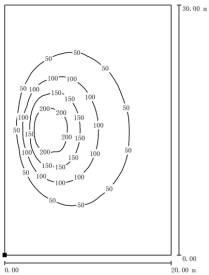

Avoid accumulation of dust, Easy to clean

Smooth surface design, avoid accumulation of dust, which has been proved detrimental to the luminaire as it will interfere with the heat dissipation.

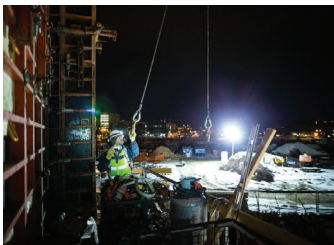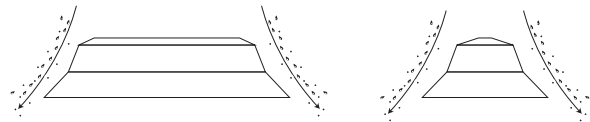

Specifications

General Informations	
Product Name	NEX Astro Flood Light
Rated Power	80W
Luminous Efficiency	135 lm/W
Luminous Flux	≥10800 lumen
Color Temp.	Cool white (5700K±500)
CRI (Ra)	≥70 (≥80 Optional)
Beam Angle	60Dx90D (30Dx60D Optional)
IP Protection	IP66
Dimensions	H288xW427xD167mm
Housing Color	White (Black Optional)
Operating Temp.	-40°C to 55°C
Operating Humi.	15% to 90%
Life Span(L70)	50000Hrs.
Warranty	3Years*

Electrical Informations	
Driver	Included driver
Input Voltage	AC100-277V
Frequency	50/60Hz
Power Factor	≥0.95
Dimmable	No
Certificates & Test reports	
Certificates	CE, RoHS, TISI
Test Reports	LM80/TM21

Remark: The information contained in this document is subject to change without notice.
* 18Hrs/Day

