
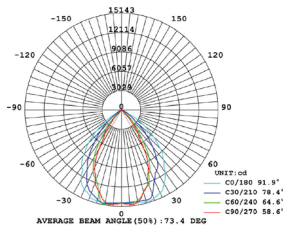




Excellent light distribution

Special rectangular light distribution, more uniform illumination effect, suitable for outside open spaces.

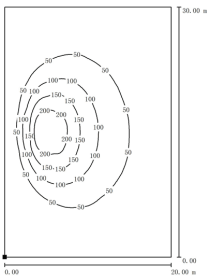

Avoid accumulation of dust, Easy to clean

Smooth surface design, avoid accumulation of dust, which has been proved detrimental to the luminaire as it will interfere with the heat dissipation.

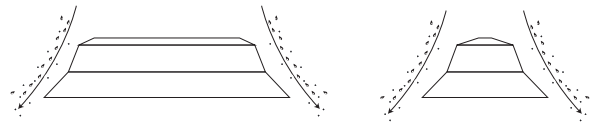

Specifications

General Informations		Electrical Informations	
Product Name	NEX Astro FL-150	Driver	Included driver
Rated Power	150W	Input Voltage	AC100-277V
Luminous Efficiency	135 lm/W	Frequency	50/60Hz
Luminous Flux	≥20250 lumen	Power Factor	≥0.95
Color Temp.	Cool white (5700K±500)	Dimmable	No
CRI (Ra)	≥70 (≥80 Optional)	Certificates & Test reports	
Beam Angle	60Dx90D (30Dx60D Optional)	Certificates	CE, RoHS, TISI
IP Protection	IP66	Test Reports	LM80/TM21
Dimensions	H288xW427xD167mm	Remark: The information contained in this document is subject to change without notice. * 18Hrs/Day	
Housing Color	White (Black Optional)	<div> </div>	
Operating Temp.	-40°C to 55°C		
Operating Humi.	15% to 90%		
Life Span(L70)	50000Hrs.		
Warranty	3Years*		