


NEX Everest

Flood Light 10W

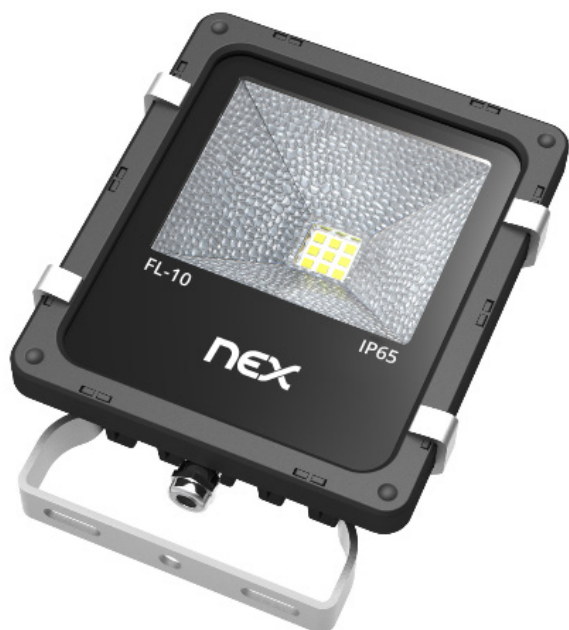


Lm≥1000

PF≥0.9

IP65

110° Beam Angle

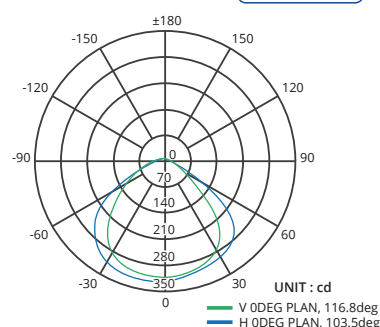

2m	81.03Lx	507.59cm
4m	20.26Lx	1015.18cm
6m	9.003Lx	1522.77cm
8m	5.0641Lx	2030.36cm
10m	3.2411Lx	2537.94cm

Height E Angle:103.52deg Diameter

Features

- High grade LED chip from JAPAN
- Toughened Tempered Glass
- High efficiency reflector
- No noise, No flicker, No UV and IR
- High Power Factor (PF) for less energy lost and require smaller which cause less expenses

Specifications

Model	FL-10	Protected grade	IP65
Rated Power	10W	Beam Angle	110°
Power Factor	>0.9	Dimension	179x133mm
Input voltage	AC 85-265V	Driver Built-in	Yes
Frequency range	50/60HZ	Cover Material	Tempered Glass
Power Efficiency	>93%	Body Material	Aluminium+PC
Luminous Flux	≥1000Lm	Working Temp.	-25°C to 50°C
Color temp.	☐ Warm white (3000±300K) ☐ Natural white (4000±400K) ☐ Cool white (6000±500K)	Certificate	CE, RoHS
		Life-span	≥50,000 Hours
		Warranty	3 Years (Option 5 Years)
CRI	Ra≥83		

Remark: The information contained in this document is subject to change without notice.

NEX office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672