


NEX Everest

Flood Light 50W

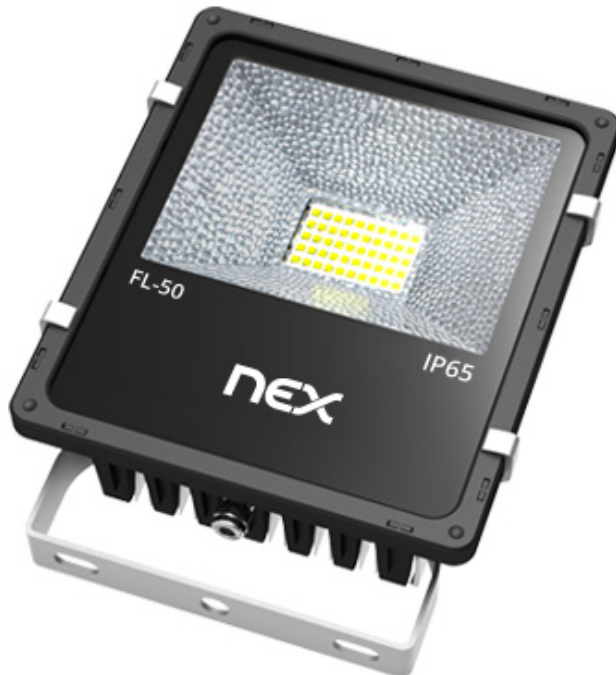


Lm≥4800

PF≥0.9

IP65

110° Beam Angle

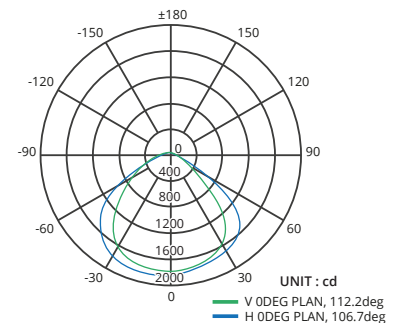

2m	382.6Lx	486.26cm
4m	95.65Lx	972.52cm
6m	42.51Lx	1458.77cm
8m	23.91Lx	1945.03cm
10m	15.30Lx	2431.29cm

Height E Angle:101.12deg Diameter

Features

- High grade LED chip from JAPAN
- Toughened Tempered Glass
- High efficiency reflector
- No noise, No flicker, No UV and IR
- High Power Factor (PF) for less energy lost and require smaller which cause less expenses

Specifications

Model	FL-50	Protected grade	IP65
Rated Power	50W	Beam Angle	110°
Power Factor	>0.9	Dimension	194x253mm
Input voltage	AC 85-265V	Driver Built-in	Yes
Frequency range	50/60HZ	Cover Material	Tempered Glass
Power Efficiency	>93%	Body Material	Aluminium+PC
Luminous Flux	≥4800Lm	Working Temp.	-25°C to 50°C
Color temp.	<input type="checkbox"/> Warm white (3000±300K) <input type="checkbox"/> Natural white (4000±400K) <input type="checkbox"/> Cool white (6000±500K)	Certificate	CE, RoHS
		Life-span	≥50,000 Hours
CRI	Ra≥83	Warranty	3 Years (Option 5 Years)

Remark: The information contained in this document is subject to change without notice.

NEX office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672