


NEX Everest

Flood Light 100W

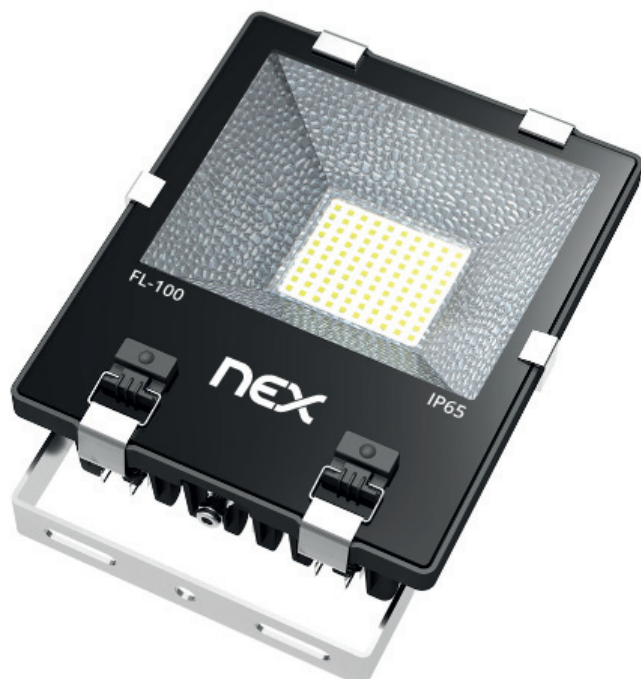


Lm≥9500

PF≥0.9

IP65

110° Beam Angle

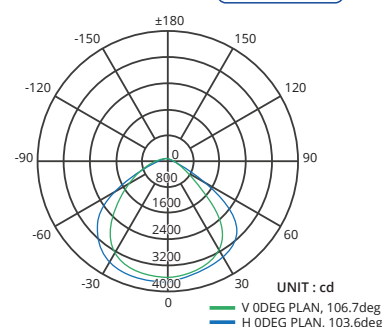

Features

- High grade LED chip from JAPAN
- Toughened Tempered Glass
- High efficiency reflector
- No noise, No flicker, No UV and IR
- High Power Factor (PF) for less energy lost and require smaller which cause less expenses

2m	735.7Lx	503.96cm
4m	183.9Lx	1007.92cm
6m	81.75Lx	1511.88cm
8m	45.98Lx	2015.88cm
10m	29.43Lx	2519.80cm

Height E Angle:103.12deg Diameter

Specifications

Model	FL-100	Protected grade	IP65
Rated Power	100W	Beam Angle	110°
Power Factor	>0.9	Dimension	250x341mm
Input voltage	AC 85-265V	Driver Built-in	Yes
Frequency range	50/60HZ	Cover Material	Tempered Glass
Power Efficiency	>93%	Body Material	Aluminium+PC
Luminous Flux	≥9500Lm	Working Temp.	-25°C to 50°C
Color temp.	☐ Warm white (3000±300K) ☐ Natural white (4000±400K) ☐ Cool white (6000±500K)	Certificate	CE, RoHS
		Life-span	≥50,000 Hours
CRI	Ra≥83	Warranty	3 Years (Option 5 Years)

Remark: The information contained in this document is subject to change without notice.

NEX office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672