

NEX Everest

Flood Light 200W




Lm≥20000

PF≥0.9

IP65

110° Beam Angle

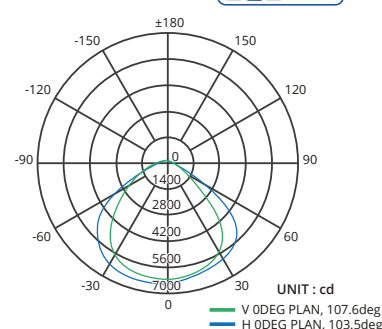

2m	1719Lx	500.63cm
4m	429.7Lx	1001.26cm
6m	191.0Lx	1501.90cm
8m	107.4Lx	2002.53cm
10m	68.7Lx	2503.16cm

Height E Angle: 102.75deg Diameter

Features

- High grade LED chip from JAPAN
- Toughened Tempered Glass
- High efficiency reflector
- No noise, No flicker, No UV and IR
- High Power Factor (PF) for less energy lost and require smaller which cause less expenses

Specifications

Model	FL-200	Protected grade	IP65
Rated Power	200W	Beam Angle	110°
Power Factor	>0.9	Dimension	340x395mm
Input voltage	AC 85-265V	Driver Built-in	Yes
Frequency range	50/60HZ	Cover Material	Tempered Glass
Power Efficiency	>93%	Body Material	Aluminium+PC
Luminous Flux	≥20000Lm	Working Temp.	-25°C to 50°C
Color temp.	☐ Warm white (3000±300K) ☐ Natural white (4000±400K) ☐ Cool white (6000±500K)	Certificate	CE, RoHS
		Life-span	≥50,000 Hours
CRI	Ra≥83	Warranty	3 Years (Option 5 Years)

Remark: The information contained in this document is subject to change without notice.

NEX office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672