


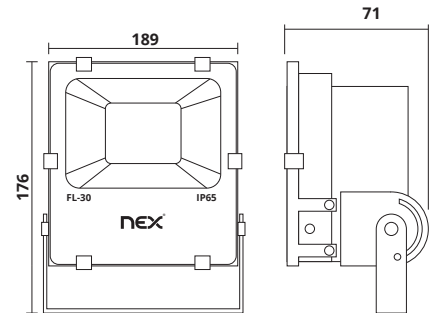

Features

- Toughened Tempered Glass
- High efficiency reflector
- No noise, No flicker, No UV and IR
- High Power Factor (PF) for less energy lost and require smaller which cause less expenses

Applications

- Warehouse, building's, hall, street lighting, Supermarket, factory, Stadium, Walkway, Etc.

Specifications

General Informations		Electrical Informations	
Product Name	NEX Everest	Driver	Included driver
Rated Power	30W	Input Voltage	AC100-277V
Luminous Efficiency	110 lm/W	Frequency	50/60Hz
Luminous Flux	≥3300 lumen	Power Factor	≥0.97
Color Temp.	Warm white (3000K±300)	Power Efficiency	≥93%
	Natural white (4000K±400)	Total Harmonic (THDi)	≤10%
	Cool white (6000K±500)	Dimmable	No
CRI (Ra)	≥80	Certificates & Test reports	
Beam Angle	110D	Certificates	CE, RoHS, TISI
IP Protection	IP65	Test Reports	LM80/TM21
Replacement	75W-90W HID	Remark: The information contained in this document is subject to change without notice.	
Dimensions	176x189x71 mm	* 18Hrs/Day	
Housing Material	Aluminum	  	
Cover material	Toughened glass	1955-2551	
Housing Color	Black		
Operating Temp.	-20°C to 50°C		
Operating Humi.	10% to 90%		
Lifespan	50000 Hrs.		
Warranty	3 Years*		