


### Features

- High luminous intensity, high efficiency
- High CRI > 90, SDCM < 3, for high-quality lighting surroundings
- Top quality CITIZEN LED, long life span of over 40000 hours
- Interior driver, 12V dimmable, compatible with traditional electronic transformer
- Originally new appearance, cinquefoil holes for convective dissipation, to guarantee long life span

### Dimensions (Unit: mm)

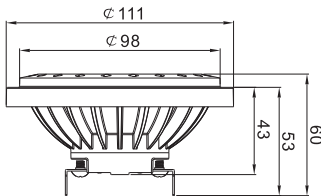

10W/12W/16W



CITIZEN COB



SDCM < 3



10W/12W/16W



CRI 80/90



15° / 30°



Color Black/ White




AC/DC 12V




3 YEAR 3 Years Warranty


### Photometric diagram

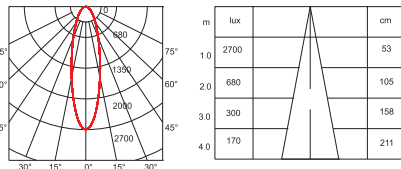

10W 30° 3000K CRI > 90

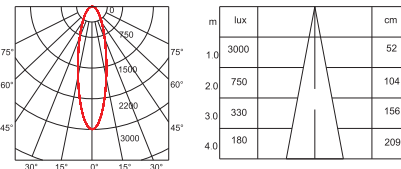

12W 30° 3000K CRI > 90

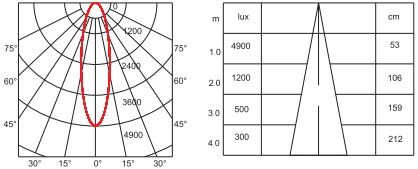

16W 30° 3000K CRI > 90

### Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-AR110-9027-AR04A-WXYD1	10W	240mA	2700K	15° 550lm/30° 766lm	90	≥ 0.9
NX-NOL-AR110-9030-AR04A-WXYD1			3000K	15° 577lm/30° 808lm		
NX-NOL-AR110-9040-AR04A-WXYD1			4000K	15° 672lm/30° 955lm		
NX-NOL-AR112-9027-AR04A-WXYD1	12W	270mA	2700K	15° 609lm/30° 808lm	90	≥ 0.9
NX-NOL-AR112-9030-AR04A-WXYD1			3000K	15° 661lm/30° 871lm		
NX-NOL-AR112-9040-AR04A-WXYD1			4000K	15° 1050lm/30° 1407lm		
NX-NOL-AR116-9027-AR04A-WXYD1	16W	380mA	2700K	15° 966lm/30° 1365lm	90	≥ 0.9
NX-NOL-AR116-9030-AR04A-WXYD1			3000K	15° 1050lm/30° 1407lm		
NX-NOL-AR116-9040-AR04A-WXYD1			4000K	15° 1113lm/30° 1459lm		

Remark: W=15(15°) W=30(30°) X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



### NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,  
410/17-23 Ratchadaphisek Rd., Samsennok,  
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565  
Fax. +662 938 3672  
Email: info@nexledtech.com


www.nexledtech.com  
www.nexinnotech.com



### Features

- High luminous intensity, high efficiency
- High CRI > 90, SDCM < 3, for high-quality lighting surroundings
- Top quality CITIZEN LED, long life span of over 40000 hours
- Interior driver, 12V dimmable, compatible with traditional electronic transformer
- Originally new appearance, cinquefoil holes for convective dissipation, to guarantee long life span

### Dimensions (Unit: mm)

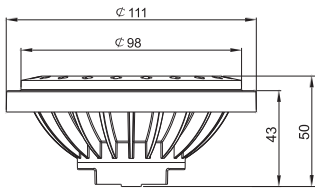

10W/12W/16W



CITIZEN COB



SDCM < 3



10W/12W/16W



CRI 80/90



15° / 30°



Color Black/ White




AC100-240/  
220-240V 50/60Hz




3 YEAR 3 Years Warranty


### Photometric diagram

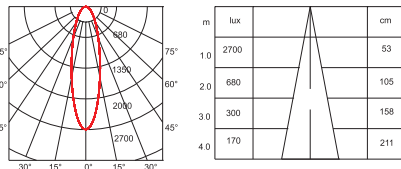

10W 30° 3000K CRI > 90

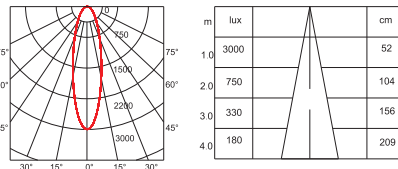

12W 30° 3000K CRI > 90

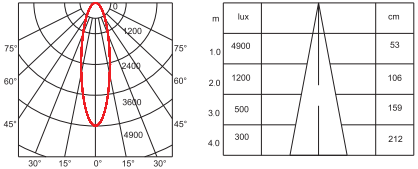

16W 30° 3000K CRI > 90

### Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-AR110-9027-AR04B-WXY	10W	240mA	2700K	15° 550lm/30° 766lm	90	≥ 0.9
NX-NOL-AR110-9030-AR04B-WXY			3000K	15° 577lm/30° 808lm		
NX-NOL-AR110-9040-AR04B-WXY			4000K	15° 672lm/30° 955lm		
NX-NOL-AR112-9027-AR04B-WXY	12W	270mA	2700K	15° 609lm/30° 808lm	90	≥ 0.9
NX-NOL-AR112-9030-AR04B-WXY			3000K	15° 661lm/30° 871lm		
NX-NOL-AR112-9040-AR04B-WXY			4000K	15° 1050lm/30° 1407lm		
NX-NOL-AR116-9027-AR04B-WXY	16W	380mA	2700K	15° 966lm/30° 1365lm	90	≥ 0.9
NX-NOL-AR116-9030-AR04B-WXY			3000K	15° 1050lm/30° 1407lm		
NX-NOL-AR116-9040-AR04B-WXY			4000K	15° 1113lm/30° 1459lm		

Remark: W=15(15°) W=30(30°) X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



### NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,  
410/17-23 Ratchadaphisek Rd., Samsennok,  
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565  
Fax. +662 938 3672  
Email: info@nexledtech.com

www.nexledtech.com  
www.nexinnotech.com