




Features

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)

Dimensions (Unit: mm)

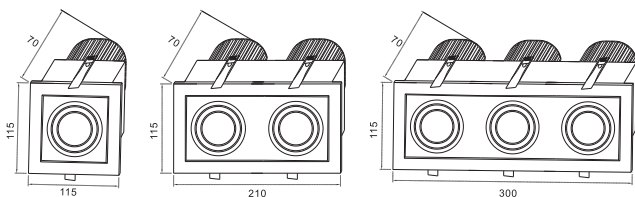

CITIZEN COB



SDCM < 3



25W / 2*25W / 3*25W



CRI 90



40°



160*160/305*160/
455*160mm




AC100-240/220-240V 50/60Hz



3 YEARS WARRANTY

Photometric diagram

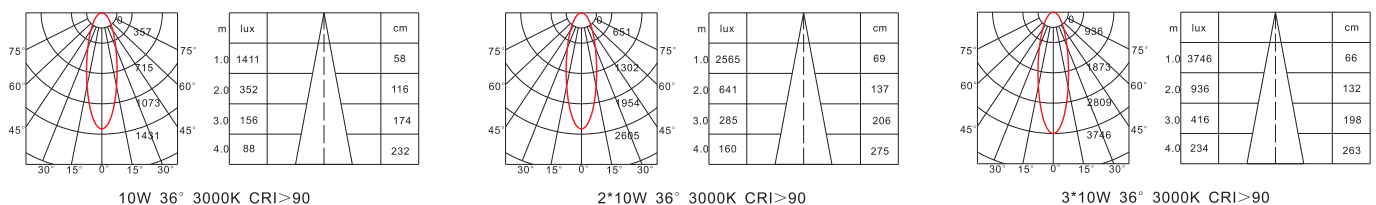

Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-GLI10-9030-1B04-36XY	10W	240mA	3000K	802lm	90	≥0.9
NX-NOL-GLI10-9040-1B04-36XY	10W	240mA	4000K	897lm	90	≥0.9
NX-NOL-GLI20-9030-2B04-36XY	2*10W	480mA	3000K	1496lm	90	≥0.95
NX-NOL-GLI20-9040-2B04-36XY	2*10W	480mA	4000K	1693lm	90	≥0.95
NX-NOL-GLI30-9030-3B04-36XY	3*10W	720mA	3000K	2351lm	90	≥0.95
NX-NOL-GLI30-9040-3B04-36XY	3*10W	720mA	4000K	2411lm	90	≥0.95

Remark: X=F(ON-OFF) X=A(1-10V) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com