

Features

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)



CITIZEN COB



SDCM < 3



25W / 2*25W / 3*25W



CRI 90



40°



160*160/305*160/
455*160mm




AC100-240/220-240V 50/60Hz




3 YEARS WARRANTY


Dimensions (Unit: mm)

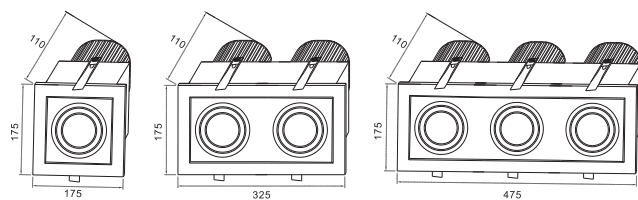


Photometric diagram

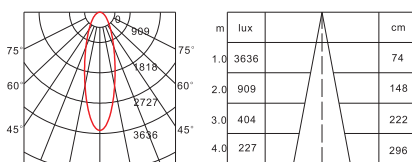

25W 40° 3000K CRI>90

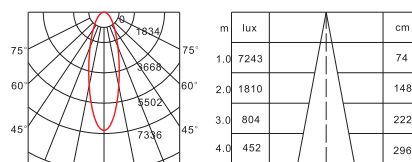

2*25W 40° 3000K CRI>90

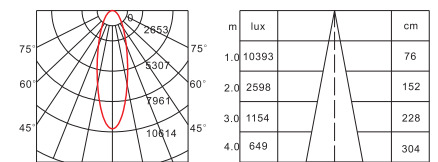

3*25W 40° 3000K CRI>90

Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-GLI25-9030-1D06-40XY	25W	600mA	3000K	2350lm	90	≥0.95
NX-NOL-GLI25-9040-1D06-40XY	25W	600mA	4000K	2550lm	90	≥0.95
NX-NOL-GLI50-9030-2D06-40XY	2*25W	1200mA	3000K	4713lm	90	≥0.95
NX-NOL-GLI50-9040-2D06-40XY	2*25W	1200mA	4000K	5100lm	90	≥0.95
NX-NOL-GLI75-9030-3D06-40XY	3*25W	1800mA	3000K	7050lm	90	≥0.95
NX-NOL-GLI75-9040-3D06-40XY	3*25W	1800mA	4000K	7650lm	90	≥0.95

Remark: X=F(ON-OFF) X=A(1-10V) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com