




Features

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)

Dimensions (Unit: mm)

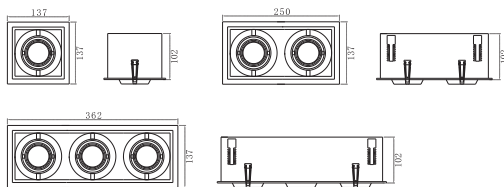

CITIZEN COB



SDCM <3



15W/2*15W/3*15W



Color Black/White



15° / 24°



120*120/230*120/
345*120mm




AC100-240/220-240V 50/60Hz




3 Years Warranty


Photometric diagram

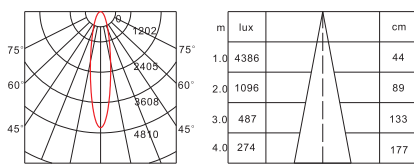

15W 24° 3000K CRI>80

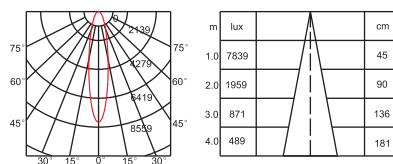

2*15W 24° 3000K CRI>80

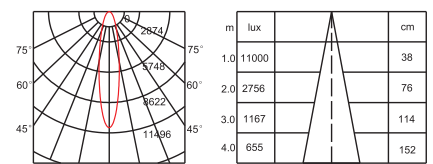

3*15W 24° 3000K CRI>80

Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-GLI15-8030-1M04-WXY	15W	360mA	3000K	15° 1470lm/24° 1577lm	80	≥0.9
NX-NOL-GLI15-8040-1M04-WXY	15W	360mA	4000K	15° 1507lm/24° 1635lm	80	≥0.9
NX-NOL-GLI30-8030-2M04-WXY	2*15W	720mA	3000K	15° 3057lm/24° 3125lm	80	≥0.95
NX-NOL-GLI30-8040-2M04-WXY	2*15W	720mA	4000K	15° 3112lm/24° 3187lm	80	≥0.95
NX-NOL-GLI45-8030-3M04-WXY	3*15W	1080mA	3000K	15° 4526lm/24° 4612lm	80	≥0.95
NX-NOL-GLI45-8040-3M04-WXY	3*15W	1080mA	4000K	15° 4589lm/24° 4674lm	80	≥0.95

Remark: W=15(15°) W=24(24°) X=F(ON-OFF) X=A(1-10V) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com