



Features

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)



CITIZEN COB



10W/2*10W/3*10W



15° / 24°



AC100-240/220-240V 50/60Hz



SDCM < 3



CRI 80




100*100/200*100
/260*100mm






3 Years Warranty

Dimensions

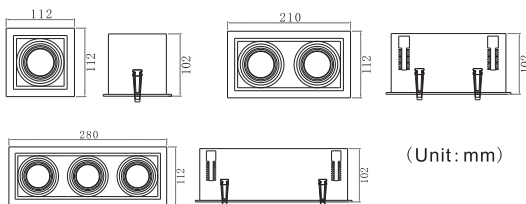

Photometric diagram

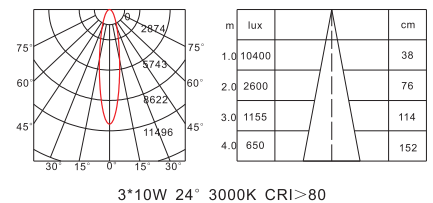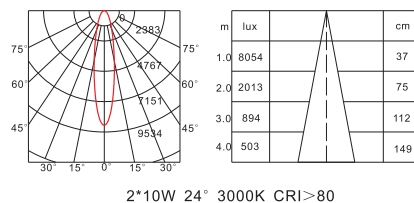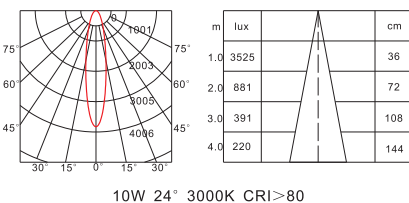

Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-GLI10-8030-1S03-WXY	10W	240mA	3000K	15° 910lm/24° 929lm	80	≥0.9
NX-NOL-GLI10-8040-1S03-WXY	10W	240mA	4000K	15° 982lm/24° 1085lm	80	≥0.9
NX-NOL-GLI20-8030-2S03-WXY	2*10W	480mA	3000K	15° 2007lm/24° 2114lm	80	≥0.95
NX-NOL-GLI20-8040-2S03-WXY	2*10W	480mA	4000K	15° 2085lm/24° 2212lm	80	≥0.95
NX-NOL-GLI30-8030-3S03-WXY	3*10W	720mA	3000K	15° 2714lm/24° 2867lm	80	≥0.95
NX-NOL-GLI30-8040-3S03-WXY	3*10W	720mA	4000K	15° 2912lm/24° 3030lm	80	≥0.95

Remark: W=15(15°) W=24(24°) X=F(ON-OFF) X=A(1-10V) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com