


NEXJupiter

LED High Bay 150W

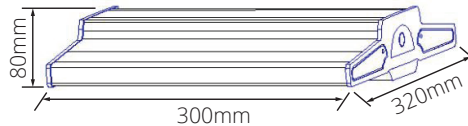

≥21500Lm

CRI≥80

PF≥0.95

Applicable

Factory, Warehouses, Stadiums, Supermarkets, Exhibition halls, Railway station, Airports, Tennis courts, Soccer fields, shooting courts and ETC.

Specifications

Product Name	Jupiter HB-150	Dimmable	Optional
Rated Power	150W	IP Protection	IP65
LED Efficiency	≥170Lm/W	Dimension	W320xL300xH80
Luminous Efficiency	≥145Lm/W	Net Weight	3.3 kg
Luminous Flux	≥21500Lm	Replacement	400W Traditional high bay
Color Temp.	Natural white (4000K±200) Cool white (6500K±300)	Heatsink Material	High heat-Conducting aviation Aluminum
CRI	≥80	Lens Material	PC
Beam Angle	60°/ 90°/ 120°	Operating Temp.	-40°C to 55°C
Input Voltage	AC 100-277V	Operating Humi.	10% to 90%
Frequency	50/60Hz	Certificate	CE, RoHS, TISI
Current	0.62A	Test Report	LM80, TM21, LM79
Power Factor	≥0.95	Life Span	≥50000Hrs.
Harmonic (THD)	≤20%	Warranty	3 Years
Function	4KV Surge protection		

Remark: The information contained in this document is subject to change without notice.

CE RoHS



NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672