


Features

- IP65, corrosion-proof, water-proof and dust-proof
- 40 and 80 degree beam angel options
- High power option: 80W, 120W, 160W, 240W, 300W, 450W, 600W
- Very low UGR (Unified Glare Rating)
- Maintenance free: Driver is international famous brand, stable current controlled, high quality driver, 1-10V and DALI dimmable available

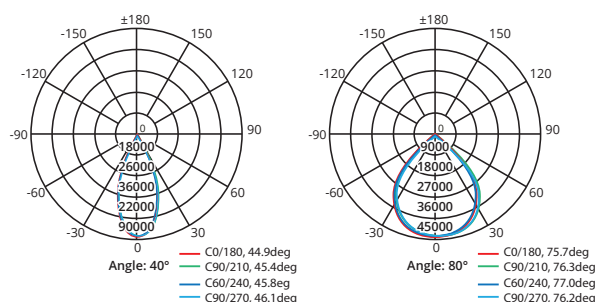

Specification

Product Name	Modular HB-600	IP Protection	IP65
Rated Power	600W	Dimension	L1155xW363xH95mm
Luminous Flux	≥66000Lm	Material	Aluminum & PC cover
Color Temp.	Warm white (3000K±200) Natural white (4000K±300) Cool white (6000K±500)	Weight	20.6KGS
CRI	≥80	Operating Temp.	-20°C to 50°C
Beam Angle	40°/ 80°	Operating Humi.	10% to 90%
Input Voltage	AC 100-277V	Certificate	CE, RoHS, TISI
Frequency	50/60Hz	Life Span	≥50000Hrs.
		Warranty	5 Years

Remark: The information contained in this document is subject to change without notice.



NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672