


≥3600Lm

CRI≥80

PF≥0.95

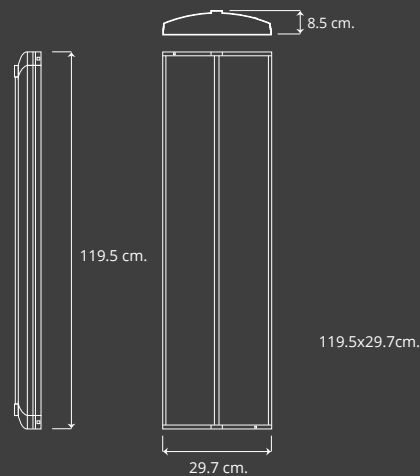

Features

- No-flicker
- Good uniformity without glare
- Less blue light
- Japanese high quality control system
- Easy install with low weight 2 kg
- New technology MCPET inside for indirect LED lighting solution
- Suitable for: High end office, School, Hotel, Restaurants, Conference rooms, Sales Area

Specification

Product Name	Enova LL-28-30120	Power Factor	≥0.95
Rated Power	28W	Harmonic (THD)	≤15%
Luminous Efficiency	≥130Lm/W	Dimension	W297 x L1195x H85 mm
Luminous Flux	≥3600Lm	Net Weight	2 kg
Color Temp.	Warm white (4000K±100)	Operating Temp.	-25°C to 45°C
CRI	≥80	Operating Humi.	10% to 90%
Beam Angle	140°	Certificate	CE, RoHS, TISI
Driver	External	Life Span	≥50000Hrs.
Input Voltage	AC180-240V	Warranty	2 Years*
Frequency	50/60Hz		
Output Voltage	DC32-42V		

Remark: The information contained in this document is subject to change without notice.*18Hrs/Day



NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672