


≥70Lm

CRI≥75



## Description

Constitute by plastic shell, PCB and line (heat-resistant, cold-resistance, UV-resistance), 3pcs SMD5050 LED. SMD LED beam angle is large and uniform, without the shadow, high brightness, low thermal resistance, low Light failure, in a poor environment can good work. This product the most can tandem connection 20pcs modules, Prohibited beyond tandem connection. The thickness of power should according to actual possible present maximum current, the power of products, wiring length (suggest not exceeding 6M) and low voltage transmission line voltage drop. In measuring power use number of circumstances, should retain 20% of the allowance.


## Specification

<b>Product Name</b>	Illumi MD-0.7	<b>IP Protection</b>	IP65
<b>Rated Power</b>	0.7W/PCS	<b>Dimension</b>	16 x 92mm
<b>Luminous Flux</b>	≥70Lm	<b>Net Weight</b>	100g
<b>Color Temp.</b>	7000K±500K	<b>Material</b>	PCB + Glue
<b>CRI</b>	≥75	<b>Operating Temp.</b>	-25°C to 45°C
<b>Beam Angle</b>	120°	<b>Operating Humi.</b>	10% to 90%
<b>Input Voltage</b>	DC12V	<b>Certificate</b>	CE, RoHS
		<b>Life Span</b>	≥50000Hrs.
		<b>Warranty</b>	2 Years*

Remark: The information contained in this document is subject to change without notice. \*12Hrs/Day

**CE RoHS**

## Connection Guideline

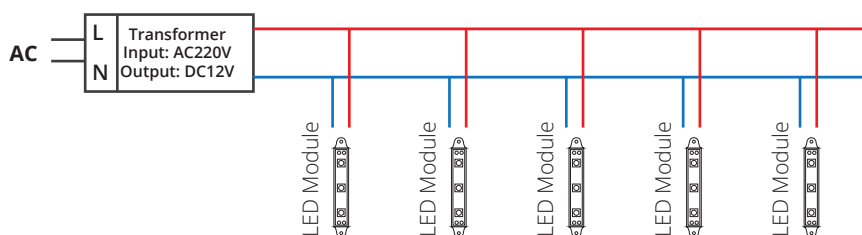

### NEX Office

#### Singapore

50 Raffles Place, #37-00 Singapore Land  
Tower 048623 Singapore  
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: [info@nexledtec.com](mailto:info@nexledtec.com) [www.nexledtec.com](http://www.nexledtec.com)

#### Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,  
New Taipei City 23674 Taiwan  
Tel.: 886-2-22697815 Fax.: 886-2-22697807

#### Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,  
Tungmahamek, Sathorn, Bangkok 10120 Thailand  
Tel.&Fax.: +662 938 3672