

NEX Illumi Module Light



9W/m

3000K


Beam Angle 120°

Feature

NX MD-09 constitute by plastic shell, PCB and line (heat-resistant, cold-resistance, UV-resistance), 4pcs SMD5050 LED. SMD LED beam angle is large and uniform, without the shadow, high brightness, low thermal resistance, low light failure, in a poor environment can good work.


Specification

Model	MD-09
Code products	MD-HT09W
Power consumption	9W Per Meter
LED chip	5050 SMD
LED quantity/module	4 PCS
LED module/meter	7 PCS
LED spacing	58±1mm
Input voltage	DC24V
Color temp.	3000K
Luminous Flux	78Lm
Beam Angle	120°
CRI	>75
IP grade	67
Dimensions	92x16x5mm
Lifespan	≥50000Hrs.

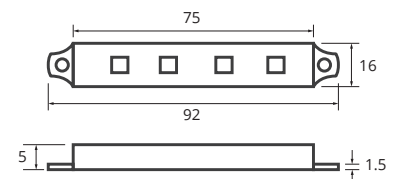

Dimension

DRIVER
Input: AC220V
Out put: DC24V

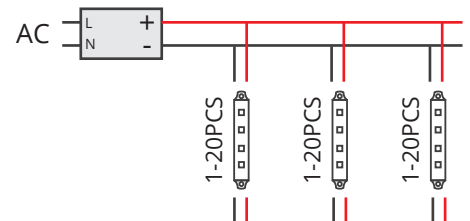

Installations

NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672