

LED Panel Light 42W

≥3400Lm

CRI≥90


120° Beam Angle

60x60cm



Features

- Aluminum body to insure heat dissipation and long life-span
- Saving up 50% energy consumption
- Instant start, no flickering, no humming
- Green environmental protection, lead-free material, conforming to RoHS
- Refined workmanship with good corner seam joint
- Excellent thermal management, refined aluminum, lengthens the life span of led light.

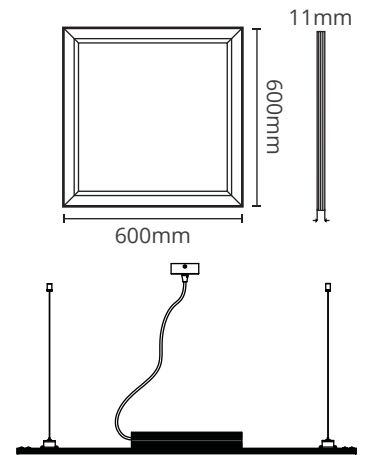

Specification

Model	Illumi PL-42	IP Protection	IP40
Rated Power	42W	Dimension	600x600X11mm
Lighting Efficiency	≥80Lm/W	Materiall	Aluminum PMMA
Luminous Flux	≥3400Lm	Operating Temp.	-20°C to 50°C
Color Temp.	Warm white (3000±300K) Natural white (4500±400K) Cool white (6500±400K)	Operating Humi.	10% to 90%
CRI	≥90	Certificate	CE, RoHS, TISI
Beam Angle	120°	Life span	≥50000Hrs.
Input Voltage	AC85-265V	Suggest Usage	12 Hrs/Day
Frequency	50/60Hz	Warranty	3 Years

Remark: The information contained in this document is subject to change without notice. *18Hrs/Day



NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672