

Panel Light 72W



≥6200Lm

CRI≥70


PF≥0.95

120° Beam Angle

60x120cm

Features

- Imported light diffusion material, mercury and lead free
- High lumen output, high efficiency, energy saving up to 60%
- Excellent heat dissipation structure, long lifespan, normal use can reach over 50000 hours
- Lead free, eco-friendly, conform to the requirements of RoHS.
- CE, RoHS and FCC certificated
- UL external constant-current driver

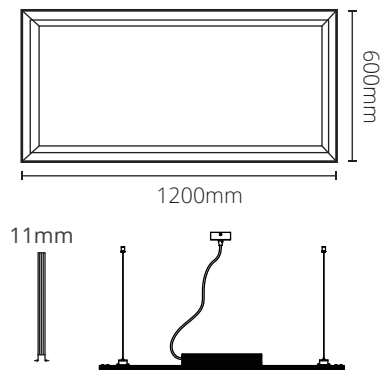

Specification

Model	Illumi PL-72	Power Factor	≥0.95
Rated Power	72W	Dimension	600x1200X11mm
Lighting Efficiency	≥86Lm/W	Material	Aluminum PMMA
Luminous Flux	≥6200Lm	Weight	7400g
Color Temp.	☐ Warm white (3000±200K) ☐ Natural white (4000±300K) ☐ Cool white (6000±500K)	Operating Temp.	-20°C to 50°C
CRI	≥70	Operating Humi.	10% to 90%
Beam Angle	120°	Certificate	CE, RoHS, TISI
Input Voltage	85-265 VAC	Life span	≥50000Hrs.
Frequency	50/60Hz	Suggest Usage	12 Hrs/Day
		Warranty	3 Years

Remark: The information contained in this document is subject to change without notice.

NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672