




Features

- High Ra > 90, high efficacy, high luminosity, SDCM < 3, make surroundings of high-quality illumination
- Glare-free design, perfect light spot with precise cast, make surroundings of comfortable illumination
- Refined components and design, guarantee a long life span of over 40000 hours
- Driver box closely attached to track rail for a neat and elegant visual feeling, to meet peculiar illumination requirements

Dimensions (Unit: mm)

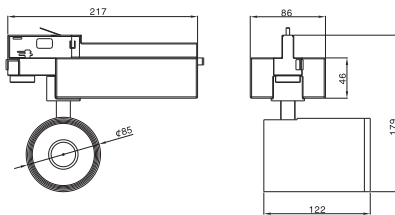

CITIZEN COB



SDCM < 3



15W/20W/25W/30W/35W



CRI 80/90



12° / 24° / 36° / 60°



Color Black/White






AC100-240/220-240V 50/60Hz



3 YEAR 3 Years Warranty

Photometric diagram

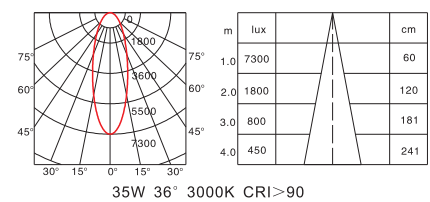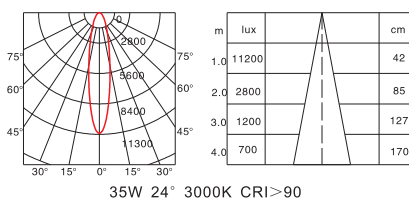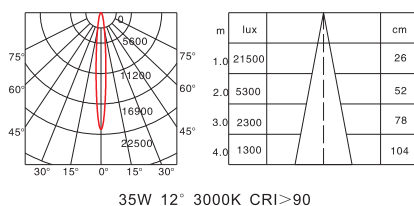

Order Information

Model	Power	LED Current	CCT	Luminous Flux	CRI	PF
NX-NOL-TRA15-9030-R85BD-WXY	15W	360mA	3000K	12° 1333lm/24° 1323lm/36° 1365lm/60° 1123lm	90	≥0.95
NX-NOL-TRA15-9040-R85BD-WXY			4000K	12° 1396lm/24° 1386lm/36° 1407lm/60° 1239lm		
NX-NOL-TRA20-9040-R85BD-WXY	20W	480mA	3000K	12° 1858lm/24° 1837lm/36° 1575lm/60° 1575lm	90	≥0.95
NX-NOL-TRA20-9040-R85BD-WXY			4000K	12° 2016lm/24° 2016lm/36° 2047lm/60° 1795lm		
NX-NOL-TRA25-9030-R85BD-WXY	25W	600mA	3000K	12° 2310lm/24° 2289lm/36° 2289lm/60° 1963lm	90	≥0.95
NX-NOL-TRA25-9040-R85BD-WXY			4000K	12° 2593lm/24° 2562lm/36° 2541lm/60° 2163lm		
NX-NOL-TRA30-9030-R85BD-WXY	30W	720mA	3000K	12° 2394lm/24° 2803lm/36° 2782lm/60° 2341lm	90	≥0.95
NX-NOL-TRA30-9040-R85BD-WXY			4000K	12° 3055lm/24° 3055lm/36° 3055lm/60° 2425lm		
NX-NOL-TRA35-9030-R85BD-WXY	35W	850mA	3000K	12° 2887lm/24° 3118lm/36° 3171lm/60° 2646lm	90	≥0.95
NX-NOL-TRA35-9040-R85BD-WXY			4000K	12° 3213lm/24° 3423lm/36° 3496lm/60° 2814lm		

Remark: W=12(12°) W=24(24°) W=36(36°) W=60(60°) X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) Y=B(Black) Y=W(White)



NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com