

≥1350Lm


CRI≥80

PF≥0.95

550mm

## Feature

- High light efficiency ≥135 Lm/w
- High Color Rendering Index (CRI) ≥80
- High Power Factor (PF) ≥0.95
- Longer life span ≥50000 hrs.
- Beam Angle 160 degree, perfect lighting effect and best color uniform

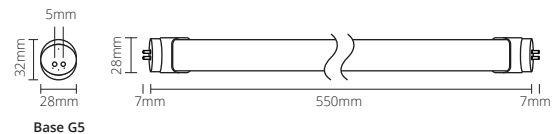

## Specification

|                            |                                                                               |                        |                         |
|----------------------------|-------------------------------------------------------------------------------|------------------------|-------------------------|
| <b>Product Name</b>        | Enova Pro G5-10                                                               | <b>Dimension</b>       | W28xH32xL550mm          |
| <b>Rated Power</b>         | 10W                                                                           | <b>Base Lamp</b>       | G5                      |
| <b>Lighting Efficiency</b> | ≥135Lm/W                                                                      | <b>Replacement</b>     | T5 14W Fluorescent tube |
| <b>Luminous Flux</b>       | ≥1350Lm                                                                       | <b>Material</b>        | Aluminum & PC cover     |
| <b>Color Temp.</b>         | Warm white (3000±100K)<br>Natural white (4000±200K)<br>Cool white (6500±300K) | <b>Cover Material</b>  | Frosted                 |
| <b>CRI</b>                 | ≥80                                                                           | <b>Weight</b>          | 105g                    |
| <b>Beam Angle</b>          | 160°                                                                          | <b>Operating Temp.</b> | -20°C to 50°C           |
| <b>Input Voltage</b>       | AC85-265V                                                                     | <b>Operating Humi.</b> | 10% to 90%              |
| <b>Frequency</b>           | 50/60Hz                                                                       | <b>Certificate</b>     | CE, RoHS, TISI          |
| <b>Power Factor</b>        | ≥0.95                                                                         | <b>Test Report</b>     | LM80, TM21, LM79        |
| <b>Harmonic (THD)</b>      | ≤15%                                                                          | <b>Life span</b>       | ≥50000Hrs.              |
|                            |                                                                               | <b>Warranty</b>        | 3 Years*                |

Remark: The information contained in this document is subject to change without notice. \*18Hrs/Day

### NEX Office

#### Singapore

50 Raffles Place, #37-00 Singapore Land  
Tower 048623 Singapore  
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: [info@nexledtec.com](mailto:info@nexledtec.com) [www.nexledtec.com](http://www.nexledtec.com)

#### Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,  
New Taipei City 23674 Taiwan  
Tel.: 886-2-22697815 Fax.: 886-2-22697807

#### Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,  
Tungmahamek, Sathorn, Bangkok 10120 Thailand  
Tel.&Fax.: +662 938 3672

≥3000Lm


CRI≥80

PF≥0.95

1150mm

## Feature

- High light efficiency ≥150 Lm/w
- High Color Rendering Index (CRI) ≥80
- High Power Factor (PF) ≥0.95
- Longer life span ≥50000 hrs.
- Beam Angle 160 degree, perfect lighting effect and best color uniform

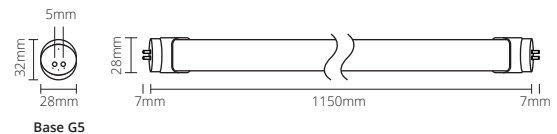

## Specification

|                            |                                                                               |                        |                         |
|----------------------------|-------------------------------------------------------------------------------|------------------------|-------------------------|
| <b>Product Name</b>        | Enova Pro G5-20                                                               | <b>Dimension</b>       | W28xH32xL1150mm         |
| <b>Rated Power</b>         | 20W                                                                           | <b>Base Lamp</b>       | G5                      |
| <b>Lighting Efficiency</b> | ≥150Lm/W                                                                      | <b>Replacement</b>     | T5 28W Fluorescent tube |
| <b>Luminous Flux</b>       | ≥3000Lm                                                                       | <b>Material</b>        | Aluminum & PC cover     |
| <b>Color Temp.</b>         | Warm white (3000±100K)<br>Natural white (4000±200K)<br>Cool white (6500±300K) | <b>Cover Material</b>  | Frosted                 |
| <b>CRI</b>                 | ≥80                                                                           | <b>Weight</b>          | 170g                    |
| <b>Beam Angle</b>          | 160°                                                                          | <b>Operating Temp.</b> | -20°C to 50°C           |
| <b>Input Voltage</b>       | AC85-265V                                                                     | <b>Operating Humi.</b> | 10% to 90%              |
| <b>Frequency</b>           | 50/60Hz                                                                       | <b>Certificate</b>     | CE, RoHS, TISI          |
| <b>Power Factor</b>        | ≥0.95                                                                         | <b>Test Report</b>     | LM80, TM21, LM79        |
| <b>Harmonic (THD)</b>      | ≤15%                                                                          | <b>Life span</b>       | ≥50000Hrs.              |
|                            |                                                                               | <b>Warranty</b>        | 3 Years*                |

Remark: The information contained in this document is subject to change without notice. \*18Hrs/Day

### NEX Office

#### Singapore

50 Raffles Place, #37-00 Singapore Land  
Tower 048623 Singapore  
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: [info@nexledtec.com](mailto:info@nexledtec.com) [www.nexledtec.com](http://www.nexledtec.com)

#### Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,  
New Taipei City 23674 Taiwan  
Tel.: 886-2-22697815 Fax.: 886-2-22697807

#### Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,  
Tungmahamek, Sathorn, Bangkok 10120 Thailand  
Tel.&Fax.: +662 938 3672

≥4500Lm


CRI≥80

PF≥0.95

1150mm

## Feature

- High light efficiency ≥150 Lm/w
- High Color Rendering Index (CRI) ≥80
- High Power Factor (PF) ≥0.95
- Longer life span ≥50000 hrs.
- Beam Angle 160 degree, perfect lighting effect and best color uniform

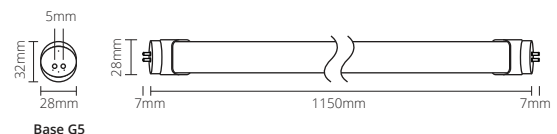

## Specification

|                            |                                                                               |                        |                         |
|----------------------------|-------------------------------------------------------------------------------|------------------------|-------------------------|
| <b>Product Name</b>        | Enova Pro G5-30                                                               | <b>Dimension</b>       | W28xH32xL1150mm         |
| <b>Rated Power</b>         | 30W                                                                           | <b>Base Lamp</b>       | G5                      |
| <b>Lighting Efficiency</b> | ≥150Lm/W                                                                      | <b>Replacement</b>     | T5 28W Fluorescent tube |
| <b>Luminous Flux</b>       | ≥4500Lm                                                                       | <b>Material</b>        | Aluminum & PC cover     |
| <b>Color Temp.</b>         | Warm white (3000±100K)<br>Natural white (4000±200K)<br>Cool white (6500±300K) | <b>Cover Material</b>  | Frosted                 |
| <b>CRI</b>                 | ≥80                                                                           | <b>Weight</b>          | 170g                    |
| <b>Beam Angle</b>          | 160°                                                                          | <b>Operating Temp.</b> | -20°C to 50°C           |
| <b>Input Voltage</b>       | AC85-265V                                                                     | <b>Operating Humi.</b> | 10% to 90%              |
| <b>Frequency</b>           | 50/60Hz                                                                       | <b>Certificate</b>     | CE, RoHS, TISI          |
| <b>Power Factor</b>        | ≥0.95                                                                         | <b>Test Report</b>     | LM80, TM21, LM79        |
| <b>Harmonic (THD)</b>      | ≤15%                                                                          | <b>Life span</b>       | ≥50000Hrs.              |
|                            |                                                                               | <b>Warranty</b>        | 3 Years*                |

Remark: The information contained in this document is subject to change without notice. \*18Hrs/Day

### NEX Office

#### Singapore

50 Raffles Place, #37-00 Singapore Land  
Tower 048623 Singapore  
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: [info@nexledtec.com](mailto:info@nexledtec.com) [www.nexledtec.com](http://www.nexledtec.com)

#### Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,  
New Taipei City 23674 Taiwan  
Tel.: 886-2-22697815 Fax.: 886-2-22697807

#### Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,  
Tungmahamek, Sathorn, Bangkok 10120 Thailand  
Tel.&Fax.: +662 938 3672