

≥1150Lm


CRI≥80

PF≥0.95

550mm

Feature

- High light efficiency ≥125 Lm/w
- High Color Rendering Index (CRI) ≥80
- High Power Factor (PF) ≥0.95
- Longer life span ≥50000 hrs.
- Beam Angle 160 degree, perfect lighting effect and best color uniform

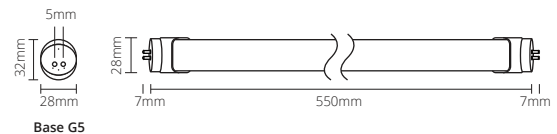

Specification

Product Name	Inspire Pro (Enova) G5-09	Dimension	W28xH32xL550mm
Rated Power	9W	Base Lamp	G5
Lighting Efficiency	≥125Lm/W	Replacement	T5 14W Fluorescent tube
Luminous Flux	≥1150Lm	Material	Aluminum & PC cover
Color Temp.	Warm white (3000±100K) Natural white (4000±200K) Cool white (6500±300K)	Cover Material	Frosted
CRI	≥80	Weight	105g
Beam Angle	160°	Operating Temp.	-20°C to 50°C
Input Voltage	AC85-265V	Operating Humi.	10% to 90%
Frequency	50/60Hz	Certificate	CE, RoHS, TISI
Power Factor	≥0.95	Test Report	LM80, TM21, LM79
Harmonic (THD)	≤15%	Life span	≥50000Hrs.
		Warranty	2 Years*

Remark: The information contained in this document is subject to change without notice. *18Hrs/Day

NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672

≥2400Lm


CRI≥80

PF≥0.95

1150mm

Feature

- High light efficiency ≥130 Lm/w
- High Color Rendering Index (CRI) ≥80
- High Power Factor (PF) ≥0.95
- Longer life span ≥50000 hrs.
- Beam Angle 160 degree, perfect lighting effect and best color uniform

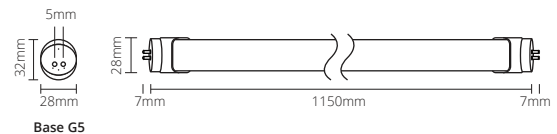

Specification

Product Name	Inspire Pro (Enova) G5-18	Dimension	W28xH32xL1150mm
Rated Power	18W	Base Lamp	G5
Lighting Efficiency	≥130Lm/W	Replacement	T5 28W Fluorescent tube
Luminous Flux	≥2400Lm	Material	Aluminum & PC cover
Color Temp.	Warm white (3000±100K) Natural white (4000±200K) Cool white (6500±300K)	Cover Material	Frosted
CRI	≥80	Weight	170g
Beam Angle	160°	Operating Temp.	-20°C to 50°C
Input Voltage	AC85-265V	Operating Humi.	10% to 90%
Frequency	50/60Hz	Certificate	CE, RoHS, TISI
Power Factor	≥0.95	Test Report	LM80, TM21, LM79
Harmonic (THD)	≤15%	Life span	≥50000Hrs.
		Warranty	2 Years*

Remark: The information contained in this document is subject to change without notice. *18Hrs/Day

NEX Office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672