




LED Chip & Bridge



Reflective Cup



The Radiator



Lamp Base

≥1100Lm


CRI≥80

PF≥0.95

Dimmable

Features

- LED original COB chip from Japan
- Perfect low energy replacement for the the 100W halogen Lamps.
- Bridge design makes it anti-glare and eye friendly.
- Energy saving up to 80% compared with traditional lights.
- Different beam angle (8°/12°/24°/36°/48°) options available to cater for different applications.
- Wide linear dimming range from 10% to 100%.
- High colour rendering index

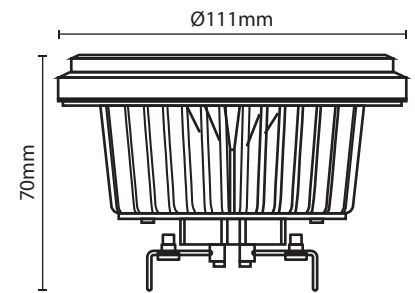

Specification

Product name	Enova AR-15 G53	Dimension	Ø111xH70mm
Rated power	15W	Base lamp	G53
LED type	COB	Replacement	100W Halogen AR111
Luminous flux	≥1100Lm	Material	Aluminum & PC cover
Color Temp.	Warm white (2700K±100)	Weight	385.5g
CRI	≥80	Operating temp.	-20°C to 40°C
Beam angle	8°/12°/24°/36°/48°	Operating humi.	10% to 90%
Input voltage	AC 220-240V	Certificate	CE, RoHS, TISI
Frequency	50/60Hz	Life Span	≥50,000Hrs.
Power factor	≥0.95	Warranty	2 Years*
Harmonic	<5%		
Dimmable type	Triac dim		

Remark: The information contained in this document is subject to change without notice.*18Hrs/Day

NEX Office & Showroom

Sookkamol Ratchada Building 2Floor,
410/17-23 Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com

Ref. Enova AR-15 V170713-1