

# NEXiSmart

# Pendant Light

# 24W

Inter-communication between lights



Remote controllable  
Group programmable  
RF Inter-communicable

## Features

- Built-in intelligent sensors, automatic adjustment.
- Automatically dim from 0-89% on standby mode, quickly light up 100% once a moving object is detected by the built-in motion sensors.
- The energy saving mode & stay on mode are optional.
- With remote, it offers RF intercommunication as the lights set in group can be light up automatically one by one.
- Made of alloy housing, durable, anti-corrosion, water-proof and dustproof.

## Intelligent Control



1. When people or car come close, the smart lamp quickly light up to 100% brightness.
2. When people or car leaving, the smart lamp drop to 10% brightness automatically.


## Remote Control




1. Through the remote controller, you can set all light in one group, when moving objects come close, the smart lamp light one by one, when the moving objects leaving, The lamps reduce to the minimum brightness one by one automatically.
2. Through the controller, you can set the lighting time
3. You also can adjust the brightness by the remote controller.

## Specification

<b>Model</b>	PD-24SM
<b>Power Consumption</b>	24W
<b>Color Temp.</b>	<input type="checkbox"/> Warm white (3000±500K) <input type="checkbox"/> Nature white (4500±500K) <input type="checkbox"/> Cool white (6000±500K)
<b>Luminous Flux</b>	<input type="checkbox"/> ≥1440Lm (WW) <input type="checkbox"/> ≥1560Lm (NW) <input type="checkbox"/> ≥1680Lm (CW)
<b>Power Factor</b>	≥0.5
<b>Beam Angle</b>	109°
<b>CRI</b>	≥80
<b>Input Voltage</b>	AC 100-240V
<b>Dimension</b>	600x148mm
<b>Material</b>	Aluminum
<b>Weight</b>	2.2Kg
<b>Working Temperature</b>	-20°C~40°C(≤95%RH)
<b>Life Span</b>	≥50000Hrs.
<b>Certificate</b>	CE, EMC, FCC, LVD, RoHS
<b>Warranty</b>	3 Years



Intercommunication - The lights set in a group can be it up automatically one by one

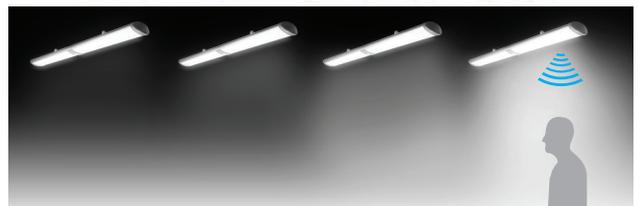

Remark: The information contained in this document is subject to change without notice.

## NEX Office

### Singapore

50 Raffles Place, #37-00 Singapore Land  
Tower 048623 Singapore  
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: [info@nexledtec.com](mailto:info@nexledtec.com) [www.nexledtec.com](http://www.nexledtec.com)

### Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,  
New Taipei City 23674 Taiwan  
Tel.: (+86-2) 22697815 Fax.: 886-2-22697807

### Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,  
Tungmahamek, Sathorn, Bangkok 10120 Thailand  
Tel.&Fax.: +662 938 3672

Ref. NEX-PD-24SM-V2.2-2014