


NEX[®] Spectra-M

16W LED Tube T8 Meat Display



Application

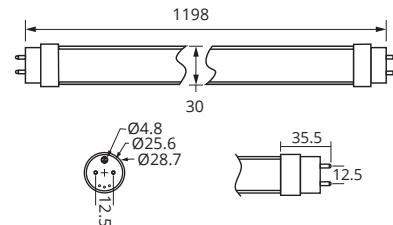

Specifications

General Informations		Electrical Informations	
Product Name	NEX Spectra-M	Driver	Included driver
Rated Power	16W	Input Voltage	AC100-240V
Luminous Flux	≥1400 lumen	Frequency	50/60Hz
Color Temp.	Warm white(2500K±300) (3000K-6000K Optional)	Input Type	Double-end
CRI (Ra)	≥90	Power Factor	>0.95
Beam Angle	140D	Total Harmonic (THDi)	<15%
IP Protection	IP20	Surge Protection	>1.5kV
Replacement	T8 36W Fluorescent tube	Light Fricker	Flicker free
Lamp Base	G13	Certificates & Test reports	
Dimensions	W26 x L1198 mm	Certificates	TUV,SSA,CE,RoHS,TISI
Weight	546 g.	Test Reports	LM80/TM21,LM79
Housing Material	Aluminum + PC	Remark: The information contained in this document is subject to change without notice. * 18Hrs/Day	
Cover Type	Milky	     	
Operating Temp.	-20°C to 45°C		
Operating Humi.	10% to 90%		
Lifespan	>50000 Hrs.		
Warranty	3 Years*		

NEX Nex Inno Tech Co.,Ltd.

410/17-23, 410/58-62 2nd Floor
Ratchadaphisek Rd., Samsennok,
Huay Kwang, Bangkok 10310, THAILAND

Tel. +662 204 7565
Fax. +662 938 3672
Email: info@nexledtech.com

www.nexledtech.com
www.nexinnotech.com

Ref. NEX Sunlight T8 18W 191017-1