


NEX Everest

Flood Light 20W

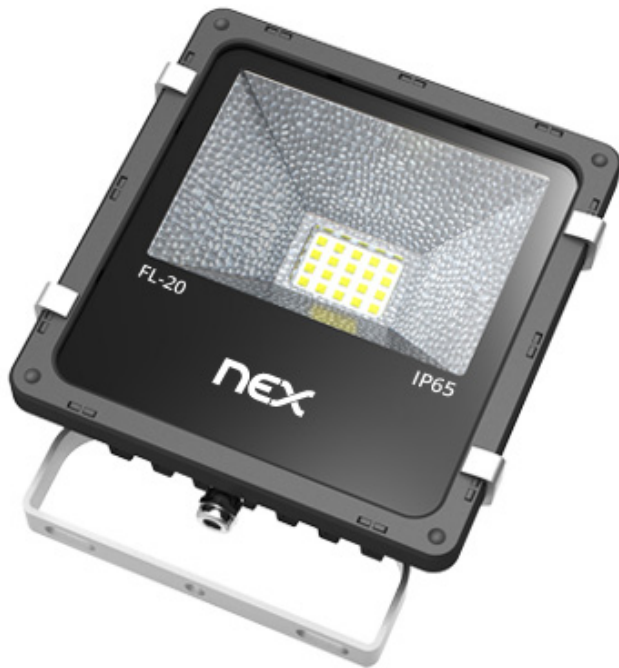


Lm≥2000

PF≥0.9

IP65

110° Beam Angle

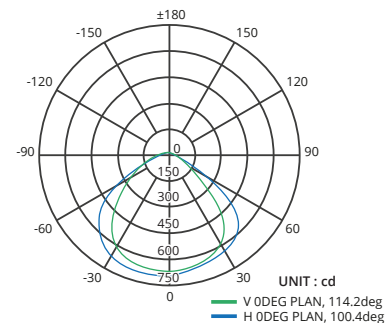

Features

- High grade LED chip from JAPAN
- Toughened Tempered Glass
- High efficiency reflector
- No noise, No flicker, No UV and IR
- High Power Factor (PF) for less energy lost and require smaller which cause less expenses

| | | |
|-----|---------|-----------|
| 2m | 160.6Lx | 473.18cm |
| 4m | 40.16Lx | 946.36cm |
| 6m | 17.85Lx | 1419.54cm |
| 8m | 10.04Lx | 1892.72cm |
| 10m | 6.426Lx | 2365.91cm |

Height E Angle:99.58deg Diameter

Specifications

| | | | |
|-------------------------|--|------------------------|--------------------------|
| Model | FL-20 | Protected grade | IP65 |
| Rated Power | 20W | Beam Angle | 110° |
| Power Factor | >0.9 | Dimension | 166x201mm |
| Input voltage | AC 85-265V | Driver Built-in | Yes |
| Frequency range | 50/60HZ | Cover Material | Tempered Glass |
| Power Efficiency | >93% | Body Material | Aluminium+PC |
| Luminous Flux | ≥2000Lm | Working Temp. | -25°C to 50°C |
| Color temp. | <input type="checkbox"/> Warm white (3000±300K) <input type="checkbox"/> Natural white (4000±400K) <input type="checkbox"/> Cool white (6000±500K) | Certificate | CE, RoHS |
| CRI | Ra≥83 | Life-span | ≥50,000 Hours |
| | | Warranty | 3 Years (Option 5 Years) |

Remark: The information contained in this document is subject to change without notice.

NEX office

Singapore

50 Raffles Place, #37-00 Singapore Land
Tower 048623 Singapore
Tel.: (+65) 6829 7014 Fax.: (+65) 6829 707

Email: info@nexledtec.com www.nexledtec.com

Taiwan

4F, No.105 Zhongcheng Rd., Tucheng Distric,
New Taipei City 23674 Taiwan
Tel.: 886-2-22697815 Fax.: 886-2-22697807

Thailand

Q House Lumpini, 1 South Sathorn Rd., 27F,
Tungmahamek, Sathorn, Bangkok 10120 Thailand
Tel.&Fax.: +662 938 3672